


BULLDOZERS FOR D9G TRACTOR

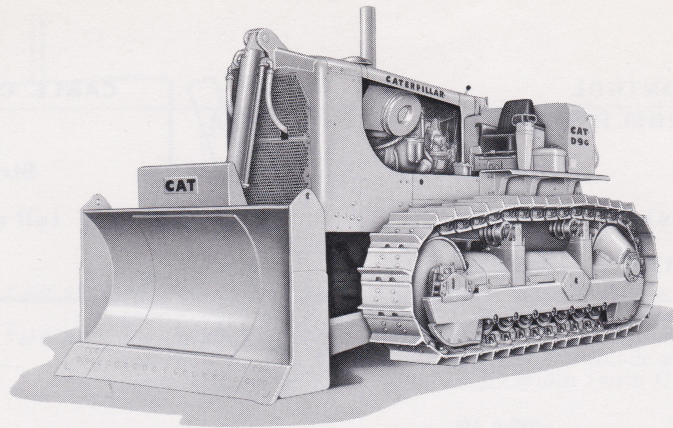

D9G with 9C Bulldozer (hydraulically controlled)

Cushion Bulldozers, Cable or Hydraulic

COMPLETE BULLDOZER consists of blade, push frame, trunnions, tapping strips, crank-case guard, and

CUSHION travel and compression

OVERALL DIMENSIONS, tractor with bulldozer:

Length

Width

BLADE:

Length

Height

Maximum ground clearance

Lift speed at rated engine RPM

Maximum drop below ground

MOLDBOARD:

Construction

Center reinforcing plate (HT Steel)

CUTTING EDGE, reversible

END BITS, self-sharpening, steel forging

SHEAVES, (12" sealed roller) Bearing lubrication interval

CABLE LENGTH, 1/2" (13 mm) 6-part line used with 129 Control

LIFT CYLINDER, double acting:
Bore x stroke

MAXIMUM USABLE TRACK SHOE WIDTH:

SHIPPING WEIGHT, without control, approx.:

For use with 129 Cable Control

For use with 193 Hydraulic Control

9C Cable

cable, sheaves and sheave brackets

9C Hydraulic

(Single Cylinder) lift cylinders, and cylinder brackets

9C Hydraulic

(Double Cylinder) lift cylinders, and cylinder brackets

(Controls are required but not included.)

5" & 160,000 lbs. (130 mm & 72600 kg)

22' 8 1/2" (6922 mm) all models

10' 1" (3073 mm) all models

10' 1" (3073 mm) all models

60" (1524 mm) all models

39 1/2" (1003 mm) all models

1.0 fps (0,31 m/sec.) 1.2 fps (0,37 m/sec.) 1.12 fps (0,34 m/sec.)

Not Limited 20 3/4" (526 mm) 20 3/4" (526 mm)

Multiple Box Section (all models)

38 7/8" x 44" x 3/4" (987 x 1118 x 19 mm)

87" x 12" x 1 1/8" (2210 x 305 x 29 mm)

20 13/16" x 13 3/4" x 1 1/4" (529 x 349 x 32 mm)

125 hr.

110' (34 m)

7" x 46 1/8"
(178 x 1172 mm)

Two Required
6 1/4" x 50 1/8"
(159 x 1273 mm)

30" (762 mm)

30" (762 mm)

30" (762 mm)

12,300 lb. (5600 kg)

12,000 lb. (5400 kg) 13,700 lb. (6200 kg)

Cushion Push Block (cannot be used with cable control)

OVERALL LENGTH (push block mounted):

Tractor with No. 9C Bulldozer

Tractor without bulldozer

22' 11 1/8" (6988 mm)

19' 1" (5817 mm)

CUSHION travel and compression

7" and 140,000 lbs.
(180 mm and 63500 kg)

WEIGHT, Installed (approx.)

2,850 lb. (1300 kg)

Materials and specifications are subject to change without notice.

CATERPILLAR

Caterpillar and Cat are Registered Trademarks of Caterpillar Tractor Co.